

## ANALOGUE INDOOR CLOCK

# SLH-OP

*The model series SLH-OP is optimally suited for the use in operating theaters, clean room environments, chemical plants, laboratories, swimming and fitness centers, as well as the food and beverage industry, canteen kitchens etc.*




# JUST A FEW STEPS TO YOUR SLH-OP

To make sure your SLH-OP meets all your requirements, you can assemble the components individually. Naturally, our experts will be happy to help.

## 1. With or without digital display?

### CONFIGURATION

Optionally, the SLH-OP is available with an additional digital display. This display can be used as a time, date or temperature display or as a stopwatch.



SLH-OP



SLH-OPD

## 2. Pick your time code variant:

### TIME CODE

Code	Time code	Ø	Power supply	Hands	Movement	Max. power consumption	Accuracy (synchronized)	Loss of signal
<b>MOBALINE SELF-SETTING: MXX</b>								
<b>SAM</b>	MOBALine	25-40	MOBALine	h/m	SAM 40	< 6mA @ 17VAC (0.1W)	< +/- 100ms	12:00 position after 24 hours
<b>SEM</b>	MOBALine	25-40	MOBALine	h/m/s	SEM 40			
<b>NTP (LAN) SELF-SETTING: NXX</b>								
<b>SAN</b>	NTP	25-40	PoE	h/m	SAN 40	PoEclass 1: <1.9W <sup>1</sup> / <3.8W <sup>2</sup>	< +/- 50ms	12:00 position after 24 hours
<b>SEN</b>	NTP	25-40	PoE	h/m/s	SEN 40			
<b>POLARIZED PULSES: IXX</b>								
<b>A</b>	Min. pulse	25-30	24-48V	h/m	AA0	6mA @ 48VDC (0.3W)	-	Standstill
<b>SEI</b>	Sec. pulse	25-40	24-60V	h/m/s	SEI 40	-	-	Standstill

<sup>1</sup> single-sided clock    <sup>2</sup> cascaded double-sided clock

## 3.

Which installation solution works?

### INSTALLATION



**N** Wall mounting



**F** Flush mounting

# 4. Which dial design do you like?

## DIAL

The SLH-OP offers the following standard design options. For logo prints, please contact our customer service.



dial 300



dial 310

Additional steps limited to configure SLH-OPD clocks:

# 5.

## Choose your display color

### DISPLAY COLOR

(SLH-OPD only) The display background is black, offering optimal display contrast. The digit color is selectable. The available variants:



red (R)



yellow (Y)



green (G)



pure green (PG)



blue (B)



white (W)

# 6. Which version do you need?

## VERSION

(SLH-OPD only) For the digital clock, the following synchronization and power supply versions are available:

CODE	SYNCHRONIZATION	POWER SUPPLY
STD	autonomous/MOBALine	24VDC
PoE	NTP	PoE
PoEclass	NTP	PoE (IEEE 802.3af class 3)

## YOUR SLH-OP IS COMPLETE

You can now order your SLH-OP and calculate the corresponding code. Enter the abbreviation for each component of your choice in the bright field and find your SLH-OP code. It serves as the order code or as the foundation for further steps.

- 1. Configuration Code
- 2. Time code Code
- 3. Installation Code
- 4. Dial Code
- 5. Display color Code
- 6. Version Code

## Example order code



1.	2.	3.	4.	5.	6.
SLH-OP	SEM	F.	300	.	.
	movement SEM 40	flush mounting	dial 300	not used <sup>1</sup>	not used <sup>1</sup>

<sup>1</sup> only required with the SLH-OPD

## Standards

Depending on the movement used in your SLH-OP clock, the following standards apply:


MOVEMENT(S)	STANDARDS
SAM 40 SEM 40 SAN 40 SEN 40	2011/65/EU / 2014/30/EU / 2014/35/EU / 2016/797/EU EN 50121-4 / EN 60950-1 / EN 61000-6-2 / EN 61000-6-3
SEI 40	2011/65/EU / 2014/30/EU / 2014/35/EU / EN 61000-6-2 EN 61000-6-3

All SLH-OP clocks are compliant with CE, RoHS and REACH.

# TECHNICAL DATA

TECHNICAL DATA		SLH-OP	SLH-OPD
<b>General</b>			
Degree of protection	IP 54		
Housing	aluminium		
Weight (kg)	5	7	
<b>Analogue clock</b>			
Diameter (mm)	248		
Reading distance (m)	20-25*		
Operating conditions	-30 to +70 °C (0 to 95% relative humidity, non-condensing)		
<b>Digital clock (SLH-OPD)</b>			
Digit height (mm)	-	38	
Time format	-	HH:MM:SS	
Reading distance (m)	-	15-22*	
Power supply	-	Standard: 100 – 240 VAC, 50 – 60 Hz VDC (on request): 18 – 56 VDC (18 – 40 VAC) PoE version: PoE (IEEE 802.3af class 0)	
Quartz accuracy at 20 °C	-	Without synchronization: ±0.3 seconds/day	
Quartz-based time maintenance (without power supply)	Mains power supply	-	From lithium battery: > 6 years
	PoE version	-	No time maintenance (> 12 hours from SuperCap on request)
Temperature precision	-	-25 to +85 °C: ±0.5 °C, -50 to +125 °C: ±2.0 °C	
Operating conditions	-	0 to +50 °C (0 to 95% relative humidity, non-condensing)	

\* The reading distance varies depending on the dial, lighting, viewing angle, etc.

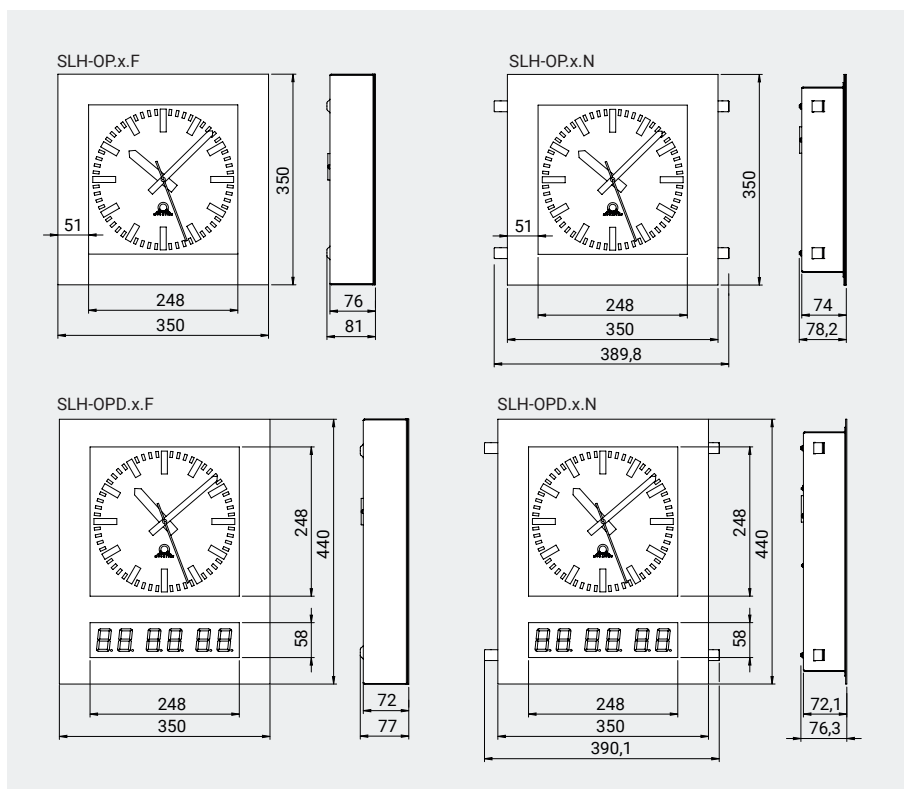

All dimensions in mm.

LE-801310.22 / 2021

*Do you have any questions?  
We are happy to help.*

Moser-Baer AG | Spitalstrasse 7 | CH-3454 Sumiswald  
Tel. +41 34 432 46 46 | Fax +41 34 432 46 99  
info@mobatime.com | www.mobatime.com



Product specifications are subject to change without notice.